



uTrack24



**Firmware Update
AudioLAN Module
Mar 2017**

1. UPDATING THE FIRMWARE OF AUDIOLAN CARD


Please check www.cymaticaudio.com/downloads for available firmware updates for your AudioLAN Module.

1.1. Setup

The firmware update can be done using the webpage user interface.


Connect the AudioLAN Module and your computer to the same router. You can also connect the Computer directly to the AudioLAN Module.

Access to the webpage is possible through a bonjour enabled application. For example, MTDDiscovery (available from www.merging.com) can be used to see the list of bonjour devices in the network.

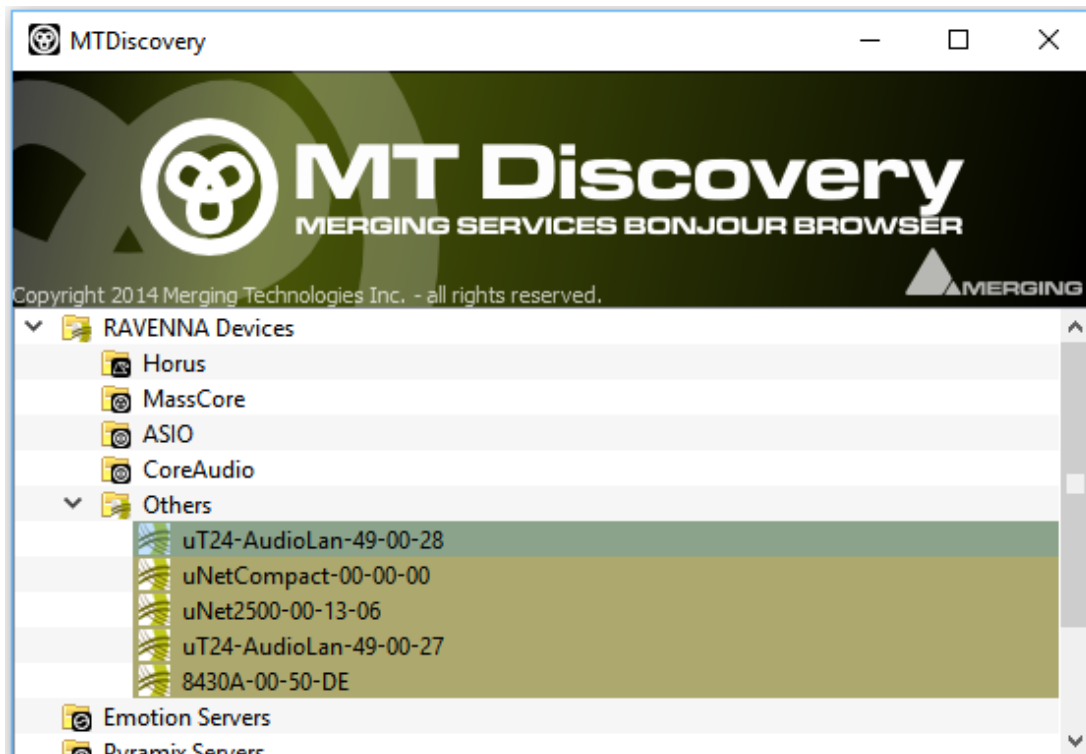


Double click on the uT24-AudioLan-XX-XX-XX item to open the webpage of your AudioLAN Module.

Click on the General Settings Tab in the Webpage. On the right hand bottom corner of the General settings, click on the “Start” button in the “Firmware Update” Panel.

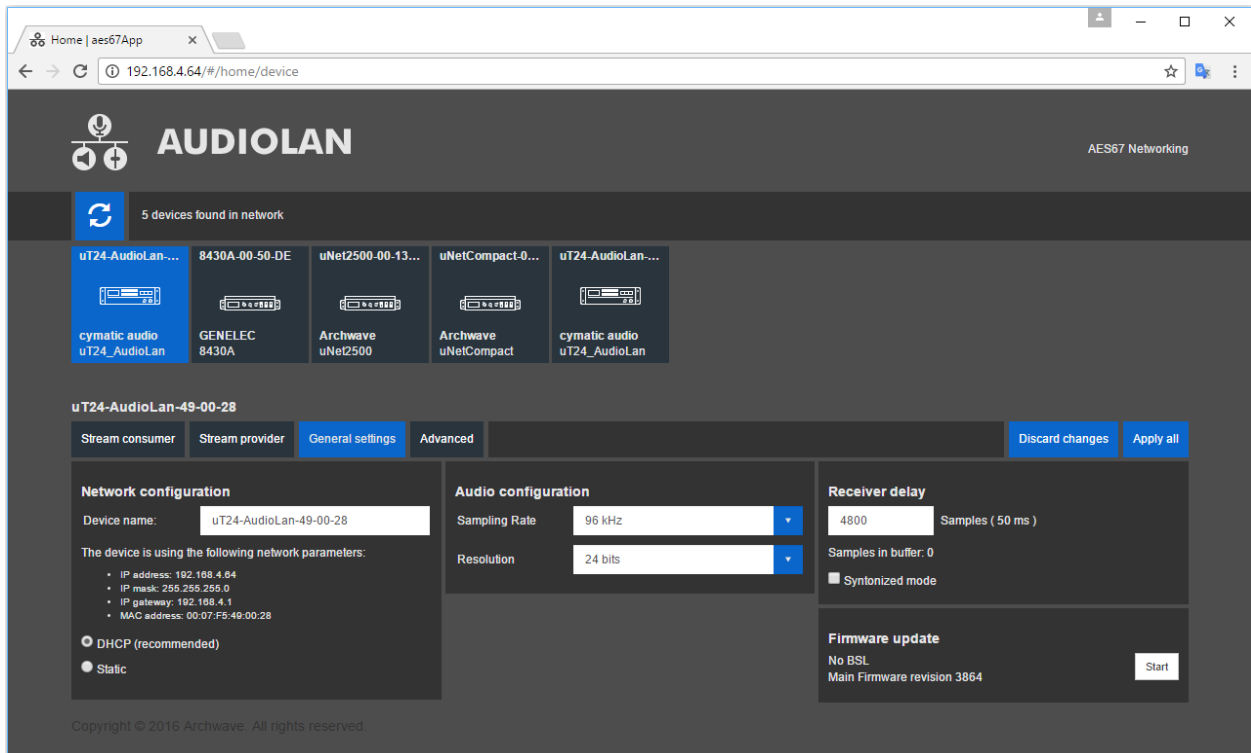


Clicking the start button will redirect to a page as shown below.

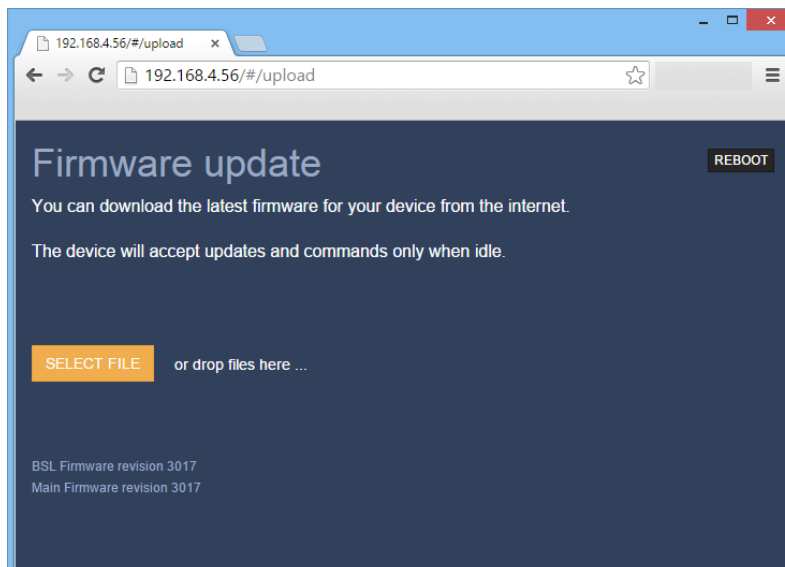


Drag and drop the firmware update file onto the orange SELECT FILE button. Alternatively click the SELECT FILE button and select the file with the file browser that opens.

Click the green “UPLOAD FIRMWARE” button that appears. The update process starts and you will see a progress bar indicating the upload progress.

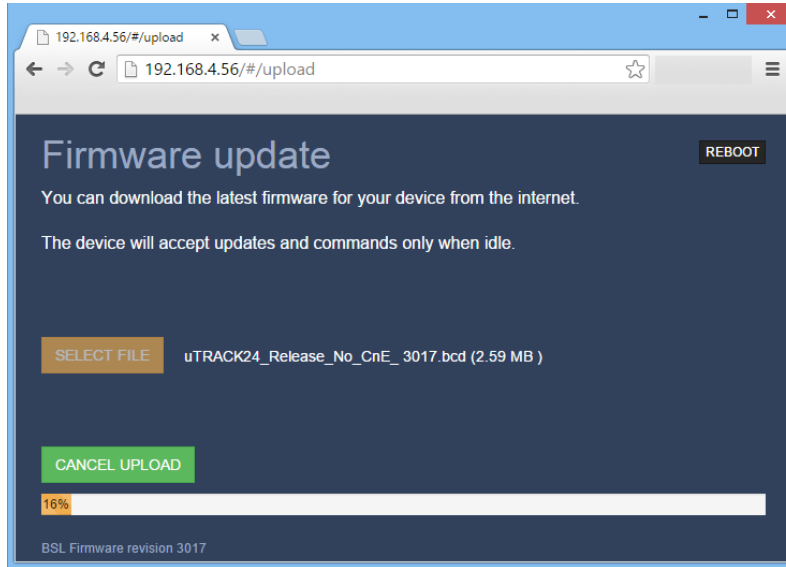

After the image is successfully updated, the browser shall ask to reboot the device. Click the green “REBOOT” button. The AudioLAN Module will reboot which concludes the update process.

Check the webpage to see the new version of the AudioLAN Module firmware.

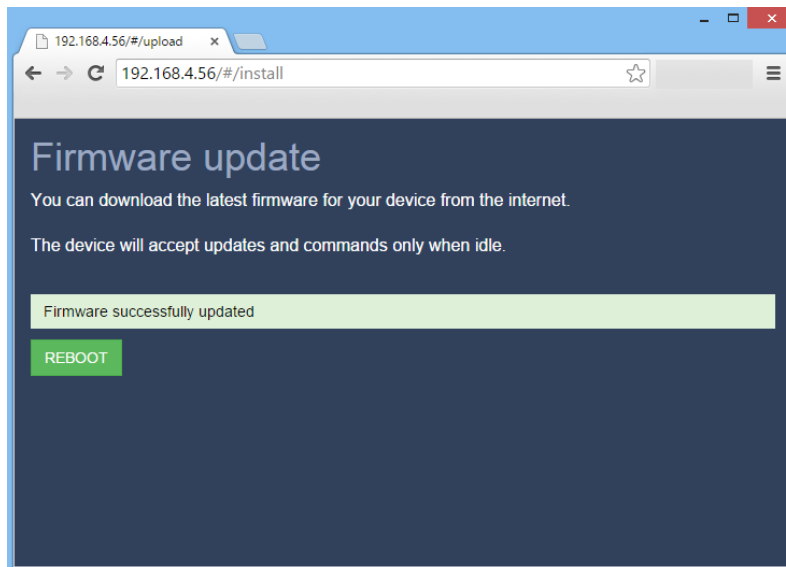



uTrack24



Cymatic Technologies B.V.
P.O. Box 208
6590 AE Gennep
The Netherlands

www.cymaticaudio.com

Support:

support@cymaticaudio.com

© copyright 2016 Cymatic Technologies B.V.

**Firmware Update
AudioLAN Module
Mar 2017**